

PART NUMBER	NOM. DIA.	A	C MAX.	D DIA.	F DRIVING FLATS	H MAX.	J DIA MAX.	K MAX.	N MIN.	R RAD.	HOLE SIZE	BREAK-OFF LIMITS	PREVAILING TORQUE IN. LBS. MIN.	DOUBLE SHEAR STRENGTH LBS. MIN.	TENSILE STRENGTH LBS. MIN.
PLT231-05-()	.179	.283 .277	.293	.180 .178	.086 .081	.096	.244	.272	.307	.020 .010	.183 .180	+0.08 +0.00	.75	1920	750
PLT231-06-()	.214	.346 .332	.328	.215 .213	.104 .099	.113	.300	.312	.372	.025 .015	.218 .215	+1.03 +0.15	1.00	3100	950
PLT231-08-()	.275	.472 .458	.379	.276 .274	.135 .130	.135	.384	.351	.511	.025 .015	.279 .276	+1.35 +0.47	1.50	5300	1500

SECOND DASH NUMBER	G GRIP	GRIP RANGE		L REF.		
		MIN	MAX	PLT231		
				-05-()	-06-()	-08-()
-01	.093	.031	.093	.733	.874	-
-02	.156	.094	.156	.795	.936	1.006
-03	.219	.157	.219	.858	.999	1.069
-04	.281	.220	.281	.920	1.061	1.131
-05	.344	.282	.344	.983	1.124	1.194
-06	.406	.345	.406	1.045	1.186	1.256
-07	.469	.407	.469	1.108	1.249	1.319
-08	.531	.470	.531	1.170	1.311	1.381
-09	.594	.532	.594	1.233	1.374	1.444
-10	.656	.595	.656	1.295	1.436	1.506
-11	.719	.657	.719	1.358	1.499	1.569
-12	.781	.720	.781	1.420	1.561	1.631
-13	.844	.782	.844	1.483	1.624	1.694
-14	.906	.845	.906	1.545	1.686	1.756
-15	.969	.907	.969	1.608	1.749	1.819
-16	1.031	.970	1.031	1.670	1.811	1.881

SECOND DASH NUMBER	G GRIP	GRIP RANGE		L REF.		
		MIN	MAX	PLT231		
				-05-()	-06-()	-08-()
-17	1.094	1.032	1.094	1.874	1.944	
-18	1.156	1.095	1.156	1.936	2.006	
-19	1.219	1.157	1.219	1.999	2.069	
-20	1.281	1.220	1.281	2.061	2.131	
-21	1.344	1.282	1.344	2.124	2.194	
-22	1.406	1.345	1.406	2.186	2.256	
-23	1.469	1.407	1.469	2.249	2.319	
-24	1.531	1.470	1.531	2.311	2.381	
-25	1.594	1.532	1.594	2.374	2.444	
-26	1.656	1.595	1.656	2.436	2.506	
-27	1.719	1.657	1.719	2.499	2.569	
-28	1.781	1.720	1.781	2.561	2.631	
-29	1.844	1.782	1.844	2.624	2.694	
-30	1.906	1.845	1.906	2.686	2.756	
-31	1.969	1.907	1.969	2.749	2.819	
-32	2.031	1.970	2.031	2.811	2.881	

▲ "G" TOLERANCE: FOR -05 AND -06 SIZES +.030/-010; FOR -08 & -10 SIZES +.040/-010.



PROCUREMENT SPEC: ESCBB-2 CLASS 3, EXCEPT AS SPECIFIED HEREIN.


MATERIAL: NUT: ALUMINUM ALLOY 7075 PER AMS-QQ-A-225/9.
 SCREW: ALLOY STEEL PER AMS6382, AMS6349, AMS6322 OR AMS-S-6758.
 SLEEVE: CORROSION RESISTANT STEEL: 303 OR 304 PER AMS-QQ-S-763, AMS5639 OR AMS5641.

HEAT TREAT: NUT: HEAT TREAT MACHINED PARTS PER AMS-H-6088 AND HEAT TREAT HEADED OR FORGED PARTS PER AMS 2770.
 SCREW: HEAT TREAT PER AMS2759, APPROXIMATELY 180,000 TO 200,000 PSI TENSILE (HRC 39-43).
 SLEEVE: AS REQUIRED FOR PERFORMANCE.

FINISH: NUT: ANODIZE PER MIL-A-8625, TYPE II, (GREEN).
 SCREW: CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2. CADMIUM PLATE PER NAS672 IS PERMISSIBLE PROVIDED IT IS FOLLOWED BY A DICHROMATE POST TREATMENT PER AMS-QQ-P-416.
 SLEEVE: PASSIVATE PER AMS2700. CADMIUM PLATE PER AMS-QQ-P-416, TYPE I, CLASS 3.

LUBRICANT: LUBRICANTS LISTED BELOW MAY BE APPLIED TO ANY OR ALL COMPONENTS IF REQUIRED FOR PERFORMANCE.

NUT: WWM CARBO-WAX, PARAFFIN WAX AND/OR CETYL ALCOHOL PER AS87132.
 SCREW & SLEEVE: DRY FILM LUBE, PER AS5272 OR MIL-PRF-81329, WWM CARBO-WAX, PARAFFIN WAX, AND/OR CETYL ALCOHOL PER AS87132.

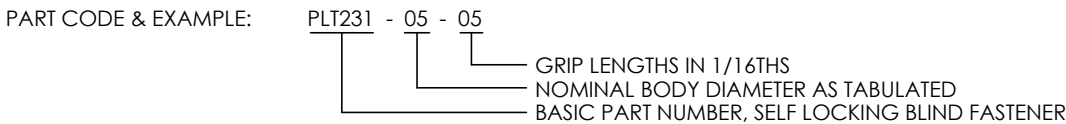

GENERAL NOTES:

1. OUTSIDE DIAMETER OF HEAD OF SCREW AND OUTSIDE DIAMETER OF SLEEVE SHALL NOT EXCEED MAXIMUM "D" DIAMETER.
2. REMOVE ALL LOOSE OR HANGING BURRS.
3. LOCKING FEATURE CONSISTS OF THREE (3) INDENTATIONS LOCATED 120° APART ON THE PERIPHERY OF THE NUT COMPONENT AND APPROXIMATELY .040 ABOVE THE INTERSECTION OF THE NUT NOSE ANGLE AND O.D. (MEAN GRIP OF FASTENER).
4. THE PRODUCT DESCRIBED BY THIS DRAWING IS "EQUIVALENT TO" AND "INTERCHANGEABLE WITH" THE MANUFACTURER'S PRODUCT LISTED BELOW EXCEPT FOR THE HEAD IDENTIFICATION MARKINGS, COLOR, AND SELF-LOCKING FEATURE. EXISTING STOCK MAY BE REWORKED TO INCORPORATE THE LOCK, WHEN THESE REWORKED FASTENERS ARE SUPPLIED. THE HEAD IDENTIFICATION MAY BE AS SHOWN BELOW:
 MONOGRAM...: PPA0164-PPA0260 SERIES (MARKING: "L" OR "SL"; NUT COLOR: RED)
 VOI-SHAN...: BDRVH SERIES (MARKING: "VS", "DV", AND "SL"; NUT COLOR: BLUE).
5. MANUFACTURER'S IDENTIFICATION: (OPTIONAL) DEPRESSED .010" MAX. LETTER "N" DESIGNATES MONOGRAM AEROSPACE FASTENERS. LETTERS "VS" DESIGNATE VOI-SHAN.
6. STANDARD FINISHES AND LUBRICANTS ARE SHOWN ABOVE. REFER TO SPECIFICATION ESCBB-4 FOR SPECIAL FINISHES AND/OR LUBRICANTS, IF REQUIRED.
7. HALF-GRIP SIZES MAY BE ORDERED BY ADDING (.5) TO THE GRIP DASH NUMBERS.
 EXAMPLE: PLT231-06-4.5 INDICATES A NOMINAL GRIP LENGTH OF 4.5 SIXTEENTHS = .281.
 THE GRIP RANGE FOR THESE HALF-GRIP SIZES WILL BE NOMINAL GRIP +.031/-.030.
 THE BASIC "G" DIMENSION WILL BE NOMINAL GRIP +.031 AND THE OVERALL SCREW LENGTH "L" DIMENSION MAY VARY AT MANUFACTURER'S OPTION.
8. DISTORTION OF "D" DIAMETER SHALL NOT PREVENT INSERTION OF THE FASTENER INTO A RING GAUGE OF LENGTH EQUAL TO ONE DIAMETER AND DIAMETER EQUAL TO MAXIMUM "D" + .002". FORCE FOR INSERTION SHALL NOT EXCEED FIVE (5) POUNDS.
9. STANDARD GRIP LENGTHS ARE AS TABULATED, SHORTER OR LONGER GRIPS THAN THOSE LISTED MAY BE AVAILABLE AS SPECIALS. ON GRIP LENGTHS SHORTER THAN THOSE LISTED, THE BREAKOFF LIMITS AND PREVAILING TORQUES AS TABULATED DO NOT APPLY.
10. THE PREVAILING TORQUE SHALL CONFORM TO THE VALUES AS TABULATED, WHEN TESTED IN ACCORDANCE WITH SPECIFICATION ESCBB-2. HOWEVER, PREVAILING TORQUES FOR THE PLT231-05-01 AND PLT231-06-01 SHALL BE RECORDED THRU A ROTATION OF ONLY 360° OF THE NUT.
11. DIMENSIONS ARE EXCLUSIVE OF LUBRICATION.

 3423 SOUTH GARFIELD AVENUE COMMERCE, CALIFORNIA 90040 (323) 722-4760 FAX (323) 727-1029	TITLE:	VISU-LOK, FASTENER, BLIND INTERNALLY THREADED, EXTERNAL SLEEVE LIGHTWEIGHT PROTRUDING HEX HEAD, SELF LOCKING 1/64" OVERSIZE		DRAWING NO:	PLT231-()-()							
				DRAWN BY:	G.MARTINEZ	DRAWN DATE:	06-22-13					
				APPROVED BY:			CHECKED DATE:					
<small>PROPRIETARY AND CONFIDENTIAL: NOTICE: THIS DRAWING IS PART OF THE PROPRIETARY ARTICLE HEREIN DISCLOSED, OWNED BY MONOGRAM AEROSPACE FASTENERS. ANY PARTY BY ACCEPTING THIS DOCUMENT ASSUME CUSTODY THEREOF AND AGREES: A: THE INFORMATION SET FORTH HEREIN IS GIVEN IN CONFIDENCE AND THIS DOCUMENT WILL NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO ANY PERSON EXCEPT TO MEET THE PURPOSE FOR WHICH IT WAS DELIVERED. B: WITHOUT THE WRITTEN CONSENT OF MONOGRAM AEROSPACE FASTENERS, THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN UNDER NO CIRCUMSTANCES WILL BE USED IN THE MANUFACTURE OR REPRODUCTION OF THE ARTICLE DISCLOSED, AND THE DELIVERY OF THIS DOCUMENT SHALL NOT CONSTITUTE ANY RIGHT OR LICENSE TO DO SO.</small>			Alcoa CAGE CODE:	5M902	MONOGRAM CAGE CODE:	98524	ECN NO:	14-0682	ECN DATE:	11/04/14	REV:	L
SHEET 2 OF 2												