

PART NUMBER	NOM DIA.		A THEO DIA.		A' DIA. MIN.		C MAX.		D DIA.		F DRIVING FLATS		H REF.		J DIA. MAX.		K MAX.		L REF.		R RAD.	
	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm
PLT1070-06-(-)	.2290	5,817	.343 .338	8,71 8,59	.311	7,90	.364	9,25	.2300 .2280	5,84 5,79	.104 .099	2,64 2,51	.047	1,19	.315	8,00	.333	8,46	.780	19,81	.030 .015	0,76 0,38
PLT1070-08-(-)	.2900	7,366	.437 .432	11,10 10,97	.405	10,29	.398	10,11	.2910 .2890	7,39 7,34	.135 .130	3,43 3,30	.061	1,55	.401	10,19	.366	9,30	.850	21,59	.030 .015	0,76 0,38
PLT1070-10-(-)	.3415	8,674	.505 .500	12,83 12,70	.473	12,01	.482	12,24	.3425 .3405	8,70 8,65	.152 .147	3,86 3,73	.068	1,73	.442	11,23	.447	11,35	1,002	25,45	.040 .020	1,02 0,51
PLT1070-12-(-)	.4045	10,274	.592 .587	15,04 14,91	.560	14,22	.567	14,40	.4055 .4035	10,30 10,25	.185 .180	4,70 4,57	.078	1,98	.531	13,49	.527	13,39	1,148	29,16	.040 .020	1,02 0,51

PART NUMBER	S MAX.		V GAGE PROT.		W GAGE DIA.		BREAK-OFF LIMITS		MINIMUM AVAILABLE GRIP LENGTH	HOLE SIZE		PREVAILING TORQUE MIN.		DOUBLE SHEAR STRENGTH MIN.		TENSILE STRENGTH MIN.	
	INCH	mm	INCH	mm	INCH	mm	INCH	mm		INCH	mm	IN-LBS	Nm	LBS.	N	LBS.	N
PLT1070-06-(-)	.015	0,38	.0324 .0293	0,823 0,744	.2671 .2669	6,784 6,779	+0,88 -0,00	+2,24 -0,00	-02	.233 .230	5,92 5,84	1.5	0,170	4600	20460	1250	5560
PLT1070-08-(-)	.015	0,38	.0273 .0244	0,693 0,620	.3731 .3729	9,477 9,472	+0,98 -0,00	+2,49 -0,00	-03	.294 .291	7,47 7,39	2.5	0,282	7900	35140	1900	8451
PLT1070-10-(-)	.015	0,38	.0312 .0281	0,792 0,714	.4320 .4318	10,973 10,967	+1,03 -0,00	+2,62 -0,00	-03	.346 .343	8,79 8,71	3.5	0,400	11350	50480	3250	14460
PLT1070-12-(-)	.015	0,38	.0456 .0420	1,158 1,067	.4854 .4852	12,329 12,324	+1,03 -0,00	+2,62 -0,00	-03	.409 .406	10,39 10,32	4.0	0,452	16450	73170	5050	22460

▲ "G" TOLERANCES: FOR -06 SIZES +.030/-0.010 (+0,762/-0,254mm), FOR -08 & -10 SIZES +.040/-0.010 (+1,016/-0,254mm), FOR -12 SIZES +.050/-0.010 (+1,270/-0,254mm).



PROCUREMENT SPEC: ESCBB-9, CLASS 1, EXCEPT AS SPECIFIED HEREIN.

MATERIAL:

NUT, & SCREW: 6AL-4V TITANIUM PER AMS4928 OR AMS4967.
SLEEVE: CORROSION RESISTANT STEEL.

HEAT TREAT:

NUT & SCREW: HEAT TREAT PER AMS-H-81200. MAX HYDROGEN 125 PPM.
SLEEVE: AS REQUIRED FOR PERFORMANCE.

FINISH:


" - " NUT & SCREW: NONE.
SLEEVE: PASSIVATE PER AMS2700.

" L " NUT: ALUMINUM COAT PER NAS4006.
SCREW: NONE.
SLEEVE: PASSIVATE PER AMS2700 AND ALUMINUM COAT PER NAS4006.

LUBRICANT:

SOLID DRY FILM LUBRICANT PER THE CHEMICAL REQUIREMENTS OF AS5272 TYPE I OR EVERLUBE 812 PER MIL-PRF-81329, PARAFFIN WAX OR CETYL ALCOHOL PER AS87132 MAY BE APPLIED TO ANY OR ALL COMPONENTS AS REQUIRED FOR PERFORMANCE. (SEE ESCBB4 FOR SPECIAL LUBRICANTS AND FINISHES)

PART CODE & EXAMPLE:

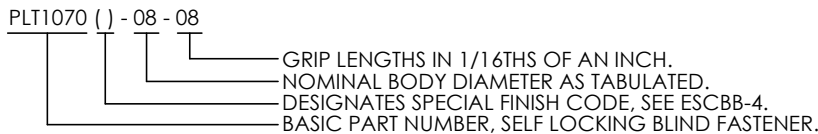

GENERAL NOTES:

1. OUTSIDE DIAMETER OF HEAD OF SCREW AND OUTSIDE DIAMETER OF SLEEVE SHALL NOT BE GREATER THAN MAXIMUM "D" DIAMETER.
2. CONCENTRICITY OF NUT HEAD CONICAL SURFACE TO "D" DIAMETER SHALL BE WITHIN 0.005" (0,13 mm) T.I.R., EXCEPT OVER INDENTATIONS.
3. REMOVE ALL LOOSE OR HANGING BURRS.
4. LOCKING FEATURE CONSISTS OF THREE (3) INDENTATIONS LOCATED 120° APART ON THE PERIPHERY OF THE NUT COMPONENT AND APPROXIMATELY .040" (1,02 mm) ABOVE THE INTERSECTION OF THE NUT NOSE ANGLE AND O.D. (MEAN GRIP OF FASTENER).
5. MANUFACTURER'S IDENTIFICATION:
LETTER "N" DESIGNATES MONOGRAM AEROSPACE FASTENERS.
LETTERS "VS" DESIGNATE ALCOA.
6. HEAD MARKINGS ON NUT DESPRESSED .010" MAXIMUM.
7. HALF-GRIP SIZES MAY BE ORDERED BY ADDING (.5) TO THE GRIP DASH NUMBERS.

EXAMPLE: PLT1070-06-4.5 INDICATES A NOMINAL GRIP LENGTH OF 4.5 SIXTEENTHS = 0.281".
THE GRIP RANGE FOR THESE HALF-GRIP SIZES WILL BE NOMINAL GRIP +.031"/-.030".
EXCEPT: THE GRIP RANGE FOR -1.5 GRIP SHALL BE MAX GRIP = 0.125", MIN GRIP = 0.078".
THE BASIC "G" DIMENSION WILL BE NOMINAL GRIP +.031" AND THE OVERALL SCREW LENGTH "L" DIMENSION MAY VARY AT MANUFACTURER'S OPTION.
8. STANDARD GRIP LENGTHS ARE SHOWN AS TABULATED, SHORTER OR LONGER GRIPS THAN THOSE LISTED MAY BE AVAILABLE AS SPECIALS. ON GRIP LENGTHS SHORTER THAN THOSE LISTED, THE BREAKOFF AND PREVAILING TORQUES DO NOT APPLY.
9. DISTORTION OF "D" DIAMETER SHALL NOT PREVENT INSERTION OF THE FASTENER INTO A RING GAUGE OF LENGTH EQUAL TO ONE DIAMETER AND DIAMETER EQUAL TO "D" MAX + .001". FORCE FOR INSERTION SHALL NOT EXCEED FIVE (5) POUNDS (22.23 NEWTONS).
10. DIMENSIONS "A", "A'", AND "H" ARE FOR ENGINEERING REFERENCE PURPOSES ONLY AND ARE NOT TO BE USED FOR INSPECTION PURPOSES. THESE DIMENSIONS ARE THEORETICAL VALUES DERIVED FROM "D", "S", "V", "W" AND HEAD ANGLE DIMENSIONS.
11. DIMENSIONS ARE EXCLUSIVE OF LUBRICATION

SECOND DASH NUMBER	G GRIP		GRIP RANGE			
			MIN		MAX	
	INCH	mm	INCH	mm	INCH	mm
-02	.156	3,96	.094	2,39	.156	3,96
-03	.219	5,56	.157	3,99	.219	5,56
-04	.281	7,14	.220	5,59	.281	7,14
-05	.344	8,74	.282	7,16	.344	8,74
-06	.406	10,31	.345	8,76	.406	10,31
-07	.469	11,91	.407	10,34	.469	11,91
-08	.531	13,49	.470	11,94	.531	13,49
-09	.595	15,11	.532	13,51	.595	15,11
-10	.656	16,66	.595	15,11	.656	16,66
-11	.719	18,26	.657	16,69	.719	18,26
-12	.781	19,84	.720	18,29	.781	19,84
-13	.844	21,44	.782	19,86	.844	21,44
-14	.906	23,01	.845	21,46	.906	23,01
-15	.969	24,61	.907	23,04	.969	24,61
-16	1.031	26,19	.970	24,64	1.031	26,19
-17	1.094	27,79	1.032	26,21	1.094	27,79
-18	1.156	29,36	1.095	27,81	1.156	29,36
-19	1.219	30,96	1.157	29,39	1.219	30,97
-20	1.281	32,54	1.220	30,99	1.281	32,54
-21	1.344	34,14	1.282	32,56	1.344	34,14
-22	1.406	35,71	1.345	34,16	1.406	35,71
-23	1.469	37,31	1.407	35,74	1.469	37,31
-24	1.531	38,89	1.470	37,34	1.531	38,89
-25	1.594	40,49	1.532	38,91	1.594	40,49
-26	1.656	42,06	1.595	40,51	1.656	42,06
-27	1.719	43,66	1.657	42,09	1.719	43,66
-28	1.781	45,24	1.720	43,69	1.781	45,24
-29	1.844	46,84	1.782	45,26	1.844	46,84
-30	1.906	48,41	1.845	46,86	1.906	48,41
-31	1.969	50,01	1.907	48,44	1.969	50,01
-32	2.031	51,59	1.970	50,04	2.031	51,59

3423 SOUTH GARFIELD AVENUE
COMMERCE, CALIFORNIA 90040
(323) 722-4760 FAX (323) 727-1029

TITLE: VISU-LOK, FASTENER, BLIND INTERNALLY THREADED, EXTERNAL SLEEVE TITANIUM 100° REDUCED FLUSH HEAD, SELF LOCKING 1/32" O/S TO PLT1058; 1/64" O/S TO PLT1064

DRAWING NO: PLT1070()-()-()
DRAWN BY: B. GEE
DRAWN DATE: 11/14/13
APPROVED BY:
CHECKED DATE:

PROPRIETARY AND CONFIDENTIAL: NOTICE: THIS DRAWING IS PART OF THE PROPRIETARY ARTICLE HEREIN DISCLOSED, OWNED BY MONOGRAM AEROSPACE FASTENERS. ANY PARTY BY ACCEPTING THIS DOCUMENT ASSUME CUSTODY THEREOF AND AGREES: A: THE INFORMATION SET FORTH HEREIN IS GIVEN IN CONFIDENCE AND THIS DOCUMENT WILL NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO ANY PERSON EXCEPT TO MEET THE PURPOSE FOR WHICH IT WAS DELIVERED. B: WITHOUT THE WRITTEN CONSENT OF MONOGRAM AEROSPACE FASTENERS, THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN UNDER NO CIRCUMSTANCES WILL BE USED IN THE MANUFACTURE OR REPRODUCTION OF THE ARTICLE DISCLOSED, AND THE DELIVERY OF THIS DOCUMENT SHALL NOT CONSTITUTE ANY RIGHT OR LICENSE TO DO SO.

Alcoa CAGE CODE: 5M902
MONOGRAM CAGE CODE: 98524
DCN NO: 14-0733
DCN DATE: 11/10/14
REV: H
SHEET 2 OF 2