

TABLE I

PART NUMBER	Ø NOM		Ø A THEO		Ø A' MIN		C MAX		Ø D		Ø E MAX		F WRENCH FLATS		(H)		Ø J MAX		(K)		R RAD.		S MAX	
	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm
PLT6010-05-(-)	.1675	4.25	.332 .325	8.43 8.25	.296	7.52	.285	7.24	.1680 .1675	4.267 4.254	.1645	4.18	.086 .081	2.18 2.06	.067	1.70	.244	6.20	.257	6.53	.030 .010	0.76 0.25	.012	0.30
PLT6010-06-(-)	.2020	5.13	.385 .378	9.78 9.60	.342	8.69	.320	8.13	.2025 .2020	5.143 5.131	.1990	5.05	.104 .099	2.64 2.52	.075	1.90	.300	7.62	.288	7.32	.030 .015	0.76 0.38	.015	0.38
PLT6010-08-(-)	.2630	6.68	.507 .499	12.88 12.67	.463	11.76	.355	9.02	.2635 .2630	6.693 6.580	.2600	6.04	.135 .130	3.43 3.30	.101	2.57	.384	9.75	.320	8.13	.030 .015	0.76 0.38	.015	0.38
PLT6010-10-(-)	.3145	7.99	.635 .626	16.13 15.90	.577	14.66	.440	11.18	.3150 .3145	8.001 7.988	.3115	7.91	.152 .147	3.86 3.73	.132	3.35	.427	10.85	.396	10.06	.040 .020	1.02 0.51	.020	0.51
PLT6010-12-(-)	.3775	9.59	.762 .752	19.35 19.10	.696	17.68	.525	13.34	.3780 .3775	9.601 9.588	.3745	9.51	.185 .180	4.70 4.57	.159	4.04	.516	13.11	.473	12.01	.040 .020	1.02 0.51	.023	0.58

TABLE I (CONTINUED)

PART NUMBER	V (GAGE PROTRUSION)		Ø W (GAGE)		BREAK-OFF LIMITS		MINIMUM AVAILABLE GRIP LENGTH (TABLE II)	HOLE SIZE		PREVAILING TORQUE MIN		DOUBLE SHEAR STRENGTH MIN		TENSILE STRENGTH MIN		(L1)		(L3)	
	INCH	mm	INCH	mm	INCH	mm		INCH	mm	IN-LBS	Nm	LBS	N	LBS	N	INCH	mm	INCH	mm
PLT6010-05-(-)	.0276 .0238	0.701 0.604	.2671 .2667	6.784 6.774	+0.020 -0.068	+0.51 -1.73	-02	.171 .168	4.34 4.27	1.0	0.113	3150	14010	900	4000	.328	8.33	.674	17.12
PLT6010-06-(-)	.0299 .0259	0.759 0.658	.3147 .3143	7.993 7.983	+0.015 -0.073	+0.38 -1.85	-02	.206 .203	5.23 5.16	1.5	0.170	4600	20460	1400	6230	.373	9.47	.659	16.74
PLT6010-08-(-)	.0353 .0307	0.897 0.780	.4245 .4241	10.782 10.772	+0.010 -0.078	+0.25 -1.98	-03	.267 .264	6.78 6.71	2.5	0.282	7900	35140	2100	9340	.417	10.59	.755	19.18
PLT6010-10-(-)	.0409 .0357	1.039 0.907	.5389 .5385	13.688 13.678	+0.010 -0.083	+0.25 -2.11	-04	.318 .315	8.08 8.00	3.5	0.400	11350	50480	3600	16010	.536	13.61	.986	25.04
PLT6010-12-(-)	.0466 .0407	1.184 1.034	.6532 .6528	16.591 16.581	+0.010 -0.093	+0.25 -2.36	-04	.381 .378	9.68 9.60	4.0	0.452	16450	73170	5600	24910	.645	16.38	1.001	25.43



APPLICABLE SPECIFICATIONS:

PROCUREMENT SPECIFICATION: PLT5000, CLASS 5, TYPE I
 PART NUMBER ASSIGNMENT: PLT5001
 INSTALLATION AND REMOVAL: PLT5002
 SPECIAL LUBE AND FINISH: PLT5003

MATERIAL:

NUT AND SCREW: 6Al-4V TITANIUM ALLOY PER AMS4928 OR AMS4967.
 SLEEVE: CRES 304 OR CRES A286.
 DRIVE NUT: MILD STEEL.

HEAT TREAT:

NUT AND SCREW: HEAT TREAT TO 95 KSI ULTIMATE SHEAR.
 SLEEVE: AS REQUIRED FOR PERFORMANCE.
 DRIVE NUT: AS REQUIRED FOR PERFORMANCE.

FINISH:

NUT AND SCREW: NONE.
 SLEEVE: PASSIVATE PER AMS2700.
 DRIVE NUT: CORROSION RESISTANT COATING, COLOR GREY.

LUBRICATION:

CODE (-): SOLID DRY FILM LUBRICANT PER THE CHEMICAL REQUIREMENTS OF AS5272 TYPE I OR EVERLUBE 812 PER MIL-PRF-81329, PARAFFIN WAX AND/OR CETYL ALCOHOL PER AS87132 MAY BE APPLIED TO ANY OR ALL COMPONENTS AS REQUIRED FOR PERFORMANCE. (SEE PLT5003 FOR SPECIAL LUBRICANTS AND FINISHES).

CODE (AA): SAME AS CODE (-) EXCEPT: COMPLETE TOP SURFACE OF HEAD OF NUT SHALL BE POWDER BLASTED TO PRODUCE A SURFACE FINISH OF RA 50-80 MICRO-INCHES AFTER ALL MANUFACTURING OPERATIONS.

EXAMPLE PART NUMBER:

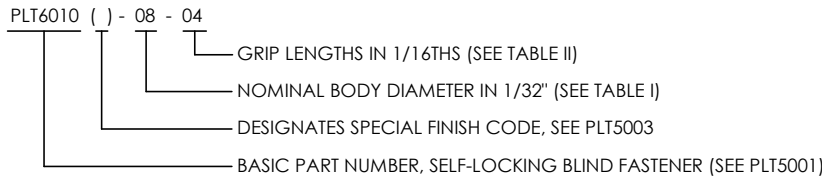


TABLE II

2ND DASH NO. △2	GRIP RANGE					
	GRIP MIN		GRIP MAX		G 3	
	INCH	mm	INCH	mm	INCH	mm
-02	.094	2.39	.156	3.96	.156	3.96
-03	.157	3.99	.219	5.56	.219	5.56
-04	.220	5.59	.281	7.14	.281	7.14
-05	.282	7.16	.344	8.74	.344	8.74
-06	.345	8.76	.406	10.31	.406	10.31
-07	.407	10.34	.469	11.91	.469	11.91
-08	.470	11.94	.531	13.49	.531	13.49
-09	.532	13.51	.595	15.11	.595	15.11
-10	.595	15.11	.656	16.66	.656	16.66
-11	.657	16.69	.719	18.26	.719	18.26
-12	.720	18.29	.781	19.84	.781	19.84
-13	.782	19.86	.844	21.44	.844	21.44
-14	.845	21.46	.906	23.01	.906	23.01
-15	.907	23.04	.969	24.61	.969	24.61
-16	.970	24.64	1.031	26.19	1.031	26.19
-17	1.032	26.21	1.094	27.79	1.094	27.79
-18	1.095	27.81	1.156	29.36	1.156	29.36
-19	1.157	29.39	1.219	30.96	1.219	30.96
-20	1.220	30.99	1.281	32.54	1.281	32.54
-21	1.282	32.56	1.344	34.14	1.344	34.14
-22	1.345	34.16	1.406	35.71	1.406	35.71
-23	1.407	35.74	1.469	37.31	1.469	37.31
-24	1.470	37.34	1.531	38.89	1.531	38.89
-25	1.532	38.91	1.594	40.49	1.594	40.49
-26	1.595	40.51	1.656	42.06	1.656	42.06
-27	1.657	42.09	1.719	43.66	1.719	43.66
-28	1.720	43.69	1.781	45.24	1.781	45.24
-29	1.782	45.26	1.844	46.84	1.844	46.84
-30	1.845	46.86	1.906	48.41	1.906	48.41
-31	1.907	48.44	1.969	50.01	1.969	50.01
-32	1.970	50.04	2.031	51.59	2.031	51.59

GENERAL NOTES:

1. LOCKING FEATURE CONSISTS OF THREE (3) INDENTATIONS LOCATED 120 ° APART ON THE PERIPHERY OF THE NUT COMPONENT.
2. HALF GRIP SIZES MAY BE ORDERED BY ADDING ".5" TO THE GRIP DASH NUMBER.
 EXAMPLE: PLT6010-06-4.5 INDICATES A NOMINAL GRIP LENGTH OF 4.5 SIXTEENTHS = .281" [7,14 mm] AND A GRIP RANGE OF .250" [6,35 mm] THRU .312" [7,92 mm].
3. "G" TOLERANCES:
 FOR -05 AND -06 SIZES; +.030/-0.010 [+0,762 mm/-0,254 mm].
 FOR -08 AND -10 SIZES; +.040/-0.010 [+1,016 mm/-0,254 mm].
 FOR -12 SIZE; +.050/-0.010 [+1,270 mm/-0,254 mm].
4. PLT6010-05-() GRIP LENGTH AVAILABILITY LIMITED TO -02 THRU -17.
5. DISTORTION OF "ØD" SHALL NOT PREVENT INSERTION OF THE FASTENER INTO A RING GAUGE OF LENGTH EQUAL TO ONE DIAMETER AND DIAMETER EQUAL TO MINIMUM RECOMMENDED HOLE SIZE. FORCE FOR INSERTION SHALL NOT EXCEED FIVE (5) POUNDS [22.23 N].
6. DIMENSIONS "J" AND "K" ARE FOR DESIGN PURPOSES ONLY, NOT FOR INSPECTION IN ACTUAL APPLICATION.
7. HEAD MARKINGS ON NUT DEPRESSED .010 INCH [0,254 mm] MAXIMUM. POSITION OPTIONAL.
8. DRIVE NUT NOT SHOWN FOR CLARITY OF HEAD MARKINGS.



3423 SOUTH GARFIELD AVENUE
 COMMERCE, CALIFORNIA 90040
 (323) 722-4760 FAX (323) 727-1029

TITLE:

VISU-LOK® II, FASTENER, BLIND,
 100° FLUSH TENSION HEAD, GROUND SHANK
 TITANIUM ALLOY

DRAWING NO:

PLT6010()-()-()

DRAWN BY:

A PEREZ

DRAWN DATE:

12/14/2013

APPROVED BY:

CHECKED DATE:

PROPRIETARY AND CONFIDENTIAL:
 NOTICE: THIS DRAWING IS PART OF THE PROPRIETARY ARTICLE HEREIN DISCLOSED, OWNED BY MONOGRAM AEROSPACE FASTENERS. ANY PARTY BY ACCEPTING THIS DOCUMENT ASSUME CUSTODY THEREOF AND AGREES:
 A: THE INFORMATION SET FORTH HEREIN IS GIVEN IN CONFIDENCE AND THIS DOCUMENT WILL NOT BE COPIED OR REPRODUCED IN WHOLE OR IN PART, NOR ITS CONTENTS REVEALED IN ANY MANNER TO ANY PERSON EXCEPT TO MEET THE PURPOSE FOR WHICH IT WAS DELIVERED.
 B: WITHOUT THE WRITTEN CONSENT OF MONOGRAM AEROSPACE FASTENERS, THIS DOCUMENT AND THE INFORMATION CONTAINED HEREIN UNDER NO CIRCUMSTANCES WILL BE USED IN THE MANUFACTURE OR REPRODUCTION OF THE ARTICLE DISCLOSED, AND THE DELIVERY OF THIS DOCUMENT SHALL NOT CONSTITUTE ANY RIGHT OR LICENSE TO DO SO.

Alcoa
 CAGE CODE:

5M902

MONOGRAM
 CAGE CODE:

98524

ECN NO:
 14-0821

ECN DATE:
 11/23/14

REV:

H

SHEET 2 OF 2